



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specifications Approval Sheet

Product Name: SAW Filter 752MHz SMD 3.0x3.0 mm (BW=36MHz)

TST Parts No.: TA2428A

Customer Parts No.: \_\_\_\_\_

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: \_\_\_\_\_ Hong Pu Lin *Hong Pu Lin*

Approval by: \_\_\_\_\_ Andy Yu *Andy Yu*

Date: \_\_\_\_\_ 2018/12/13

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## SAW Filter 752 MHz

MODEL NO.: TA2428A

REV. NO.:1

### A. MAXIMUM RATING:

1. Input Power Level: 20 dB<sub>m</sub>(Peak Power)
2. DC voltage: 5 V
3. Operating Temperature: 0°C to +50°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitivity Level: Level 1(MSL1)


RoHS Compliant  
Lead free  
Lead-free soldering

Electrostatic Sensitive Device (ESD)


### B. ELECTRICAL CHARACTERISTICS:

Item	Unit	min	type	Max
Center Frequency Fc	MHz		752	
Insertion Loss 734~770MHz IL	dB		2.9	3.5
Return Loss 734~770MHz	dB	12	16	
Passband 734~770MHz	MHz	36	47	
<b>Attenuation</b> (Reference level from 0dB)				
10~500 MHz	dB	45	53	
500~670 MHz	dB	35	41	
860~1200 MHz	dB	38	43	
1200~1400 MHz	dB	32	39	
Temperature Coefficient of Frequency	ppm/°C	-75 typ		

### C. MEASUREMENT CIRCUIT:

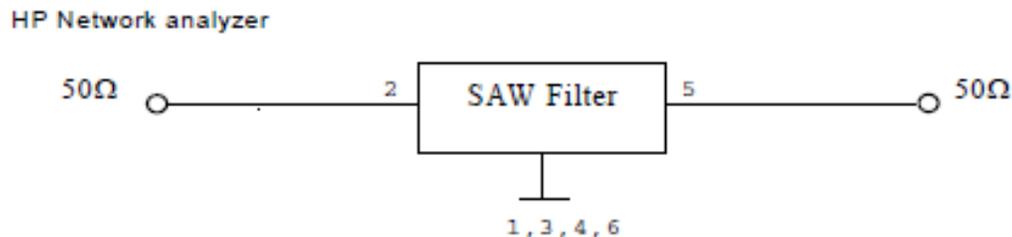

**D. OUTLINE DRAWING:**

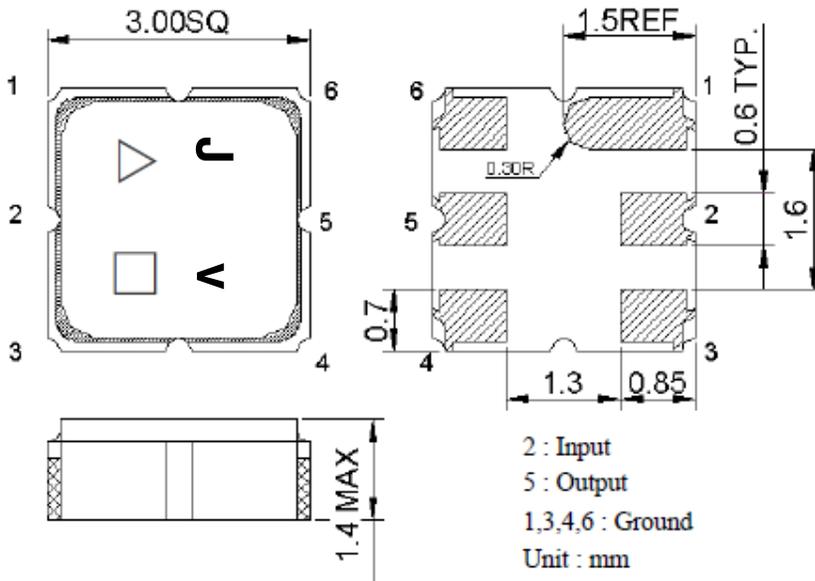


△ : Year Code (2009->9, 2010->0, ..., 2018->8)  
 □ : Date Code (Follow the table from planner each year)



Date Code Table



WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

**E. PCB Footprint:**

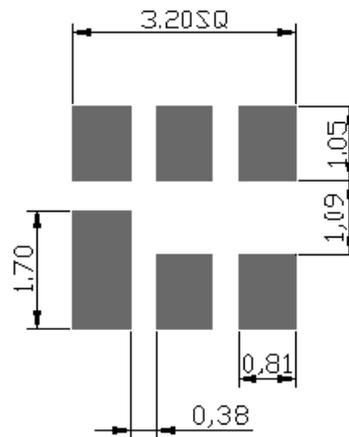

## F. Frequency Characteristics:

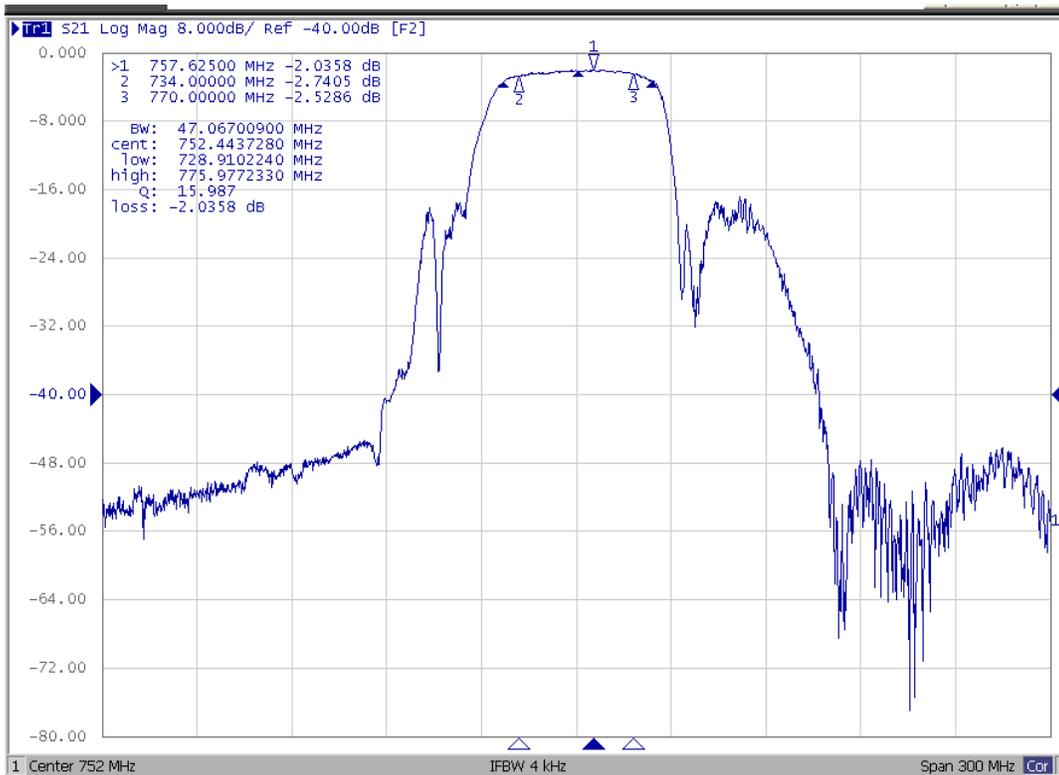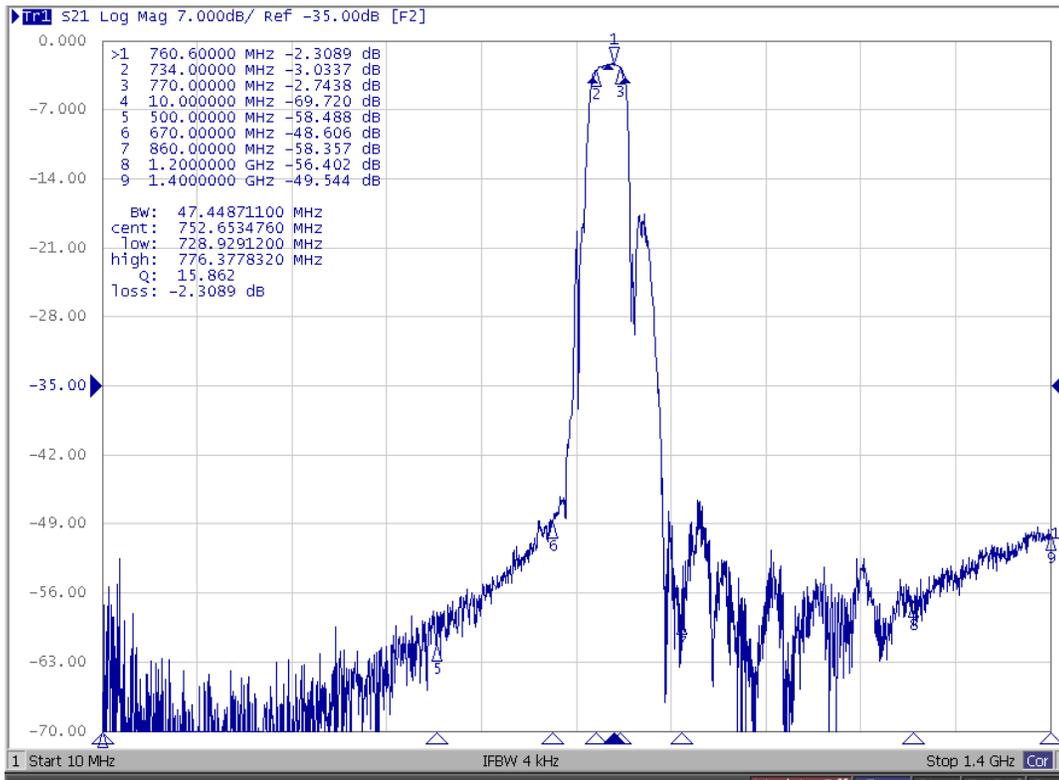

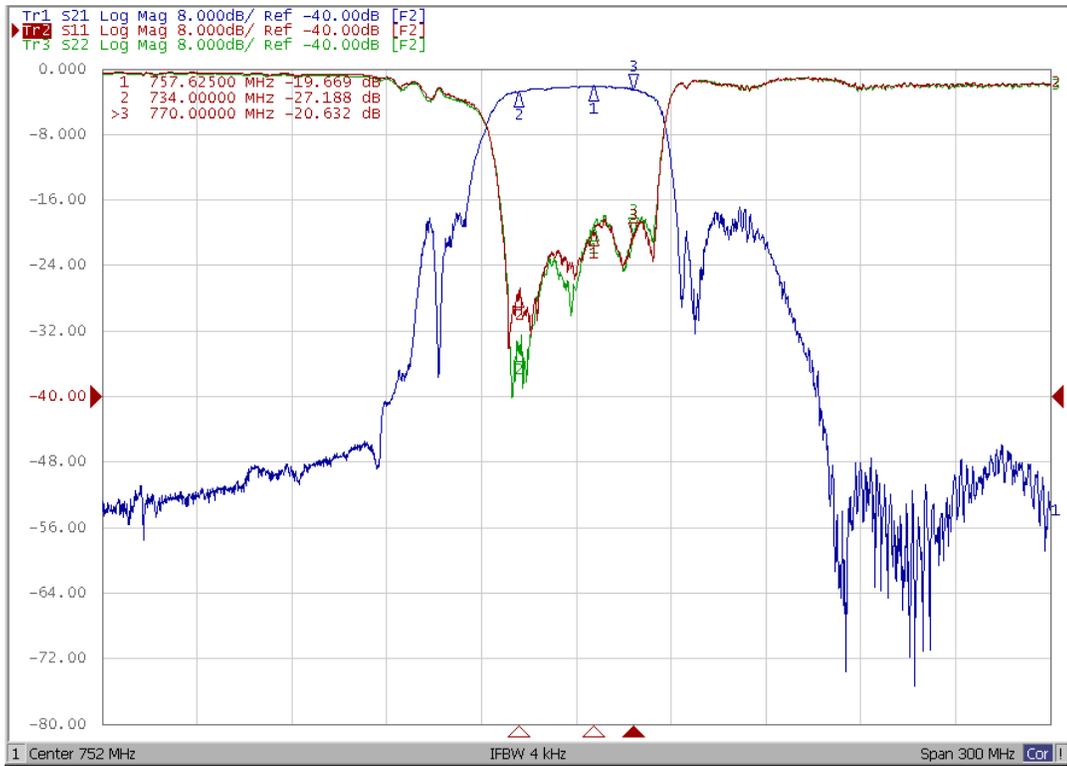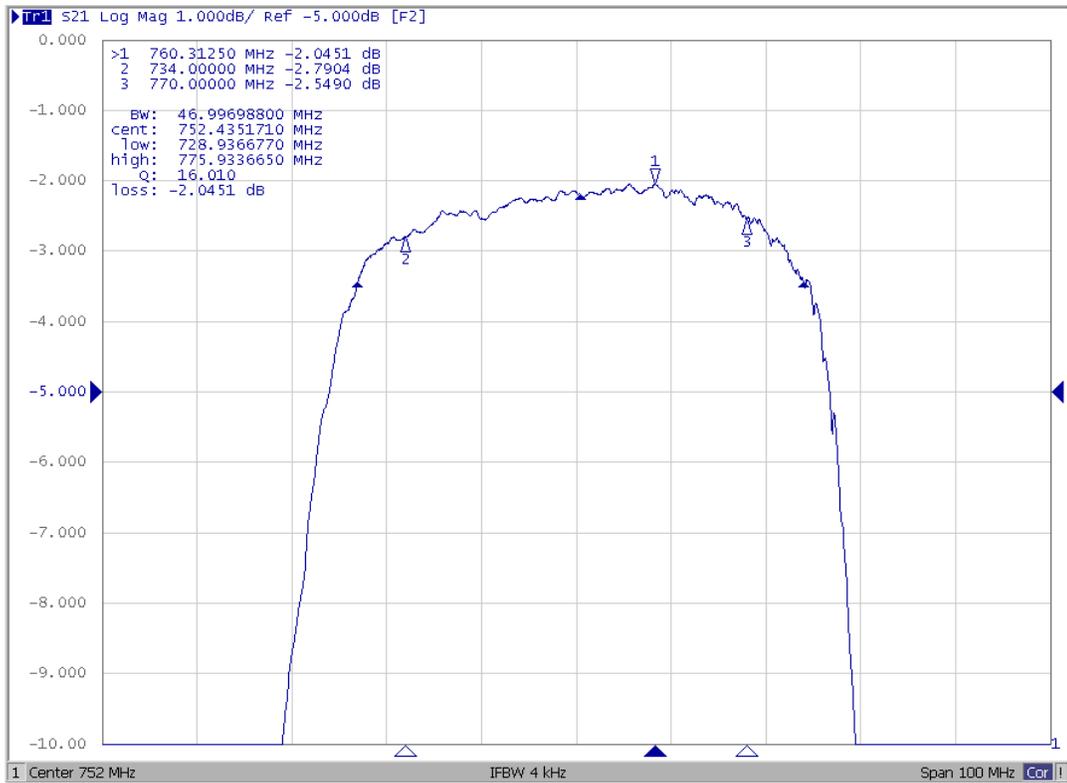



### H. Recommended Reflow Profile:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
4. Time: 2 times.

