
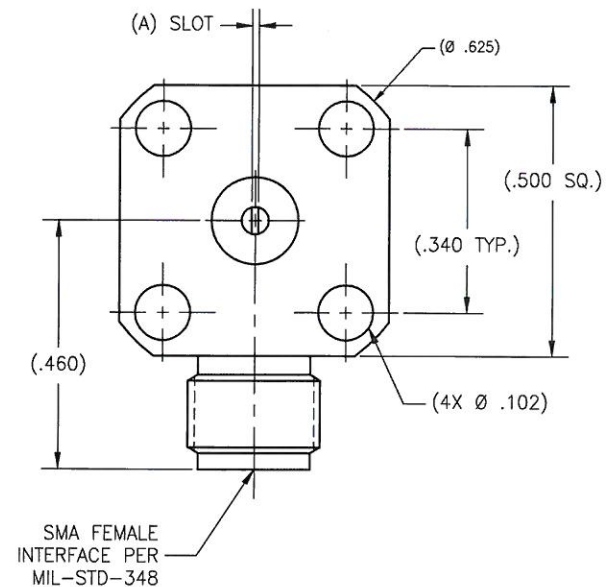


P/N	(A) SLOT
-1	.012
-1CC	.012
-1CCCE	.012
-1CCCESF	.012
-1CCSF	.012
-1SF	.012
-2	.018
-2CC	.018
-2CCCE	.018
-2CCCESF	.018
-2CCSF	.018
-2SF	.018
-3	.028
-3CC	.028
-3CCCE	.028
-3CCCESF	.028
-3CCSF	.028
-3SF	.028
-4	.036
-4CC	.036
-4CCCE	.036
-4CCCESF	.036
-4CCSF	.036
-4SF	.036

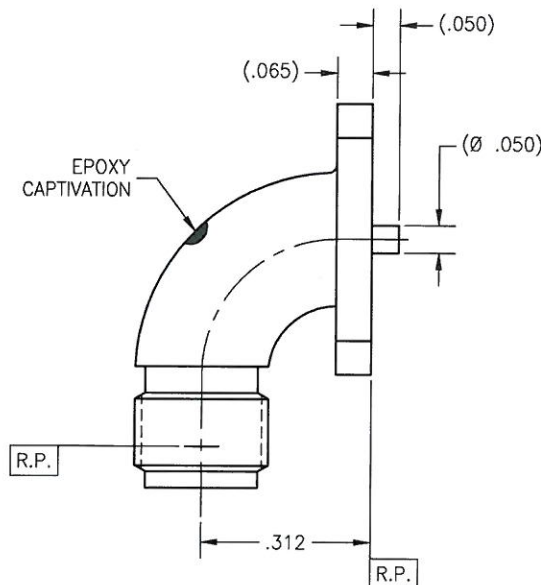

REVISIONS			
REV	DESCRIPTION	DATE	BY
A	ECO 14481 (Consolidate all dwgs)	05.02.02	ATV
B	ECO 14628	06.19.02	ATV
C	ECO 20619	10.08.07	DKN

MATERIAL(S):

Body:
304 sst per SAE-AMS-5511.
Center Conductor:
BeCu alloy per ASTM B-196.
Dielectric:
PTFE per ASTM D-1710.
Epoxy:
(for CC's): Sigma VF Type HV.
(for CE's): Ablebond 16-1

ELECTRICAL(S):

Impedance: 50 Ohms nominal.
Frequency Range: DC to 18 GHz.
VSWR: $1.06 + .005 \times f(\text{GHz})$.
Insertion Loss: .10 dB max @ 6GHz.
Working Voltage: 335 Vrms max @ sea level.
Dielectric Withstanding Voltage: 1,500 Vrms min.
R.F. HiPot Voltage: 1,000 Vrms min @ 5MHz.
Corona Level: 375 Vrms @ 70,000 ft.
Insulation Resistance: 5,000 MegOhms min.
R.F. Leakage: -60 dB min. from 2-3 GHz.
Contact Resistance:
Initial:
Center Contact: 3.0 Milliohm max.
Outer Contact: 2.0 Milliohm max.
After Environment:
Center Contact: 4.0 Milliohm max.
Outer Contact: NA.

MECHANICAL(S):

Mating Characteristics:
Interface per Mil-Std-348.
Force To Engage & Disengage:
Torque: 2 inch-pounds max.
Longitudinal Force: NA.
Center Contact Retention Force:
Axial Force: 6 pounds min.
Center Contact Captivation:
Axial Force: 6 pounds max.
Radial Torque: 4 inch-ounces max.
Connector Durability:
500 cycles min @ 12 cycles/minute max.
Permeability: Less than 2.0 mu.

ENVIRONMENTAL(S):

Temperature Range: -65°C to +125°C.
Thermal Shock:
Mil-Std-202, Method 107, Test Cond. C.
Moisture Resistance:
Mil-Std-202, Method 106, Insulation resistance at least 200 MegOhms within 5 minutes after removal from humidity.
Corrosion:
Mil-Std-202, Method 101, Test Cond. B.
Vibration:
Mil-Std-202, Method 204, Test Cond. D.
Shock:
Mil-Std-202, Method 213, Test Cond. I.

FINISH(ES):

Body: (for SF's)
Passivate per ASTM A-967.
Body: (for Basic & CC's)
Gold plate per ASTM B-488, over nickel under plate per AMS-QQ-N-290.
Center Conductor:
Gold plate per ASTM B-488, over nickel under plate per AMS-QQ-N-290.

APPLICABLE CARLISLE IT DOCUMENTS

WORK STD	PROD INST	ASSY INST

NOTICE

THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY CARLISLE INTERCONNECT TECHNOLOGIES AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE AND THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON TO INCORPORATE IN OTHER PRODUCTS ANY SPECIAL FEATURE PARTICULAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY CARLISLE INTERCONNECT TECHNOLOGIES, CERRITOS, CA 90703

TOLERANCES AND NOTES EXCEPT AS NOTED

- DIMENSIONS ARE IN INCHES.
AXES WITHIN .005 INCHES PER INCH.
LINEAR .XXX ± .010 ANGULAR ± 1/2°
FRACTION ± 1/32
1. MACHINE FINISH: $\frac{63}{\text{RMS}}$
 2. BREAK ALL SHARP EDGES .003 MAX.
 3. MACHINED FILLETS .005 MAX.
 4. MACHINED SURFACES SQUARE TO RESPECTIVE AXES WITHIN .005 INCHES PER INCH.
 5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 T.I.R.
 6. DIMENSIONS TO BE MET BEFORE PLATING.
 7. CHAMFER ALL THREADS 45°.
 8. THREADS PER UN-28
 9. REMOVE FRAYED EDGES ON TEFLON.
 10. REMOVE ALL BURRS.

MATERIAL		SPECIFICATION		PROCUREMENT	
APPROVAL INITIALS	DATE				
DRAWN BY	R.C.	03.27.02			
CHECKED BY					
TEST ENGG					
QUALITY					
DESIGN ENGG	ATV	11.07.07			
MFG ENGG					
ECO APPRV					

CARLISLE		Interconnect Technologies Cerritos, CA 90703	
TITLE SMA FEMALE RADIUS RIGHT ANGLE 4 HOLE FLANGE (.500 SQ) MOUNT TO VER. SLOT TERMINATION			
SCALE 6:1		DIRECTORY/SUB-DIRECTORY OL	
		SHEET 1 of 1	
SIZE C	CAGE CODE 30990	DRAWING NO. 5581	REV. C