

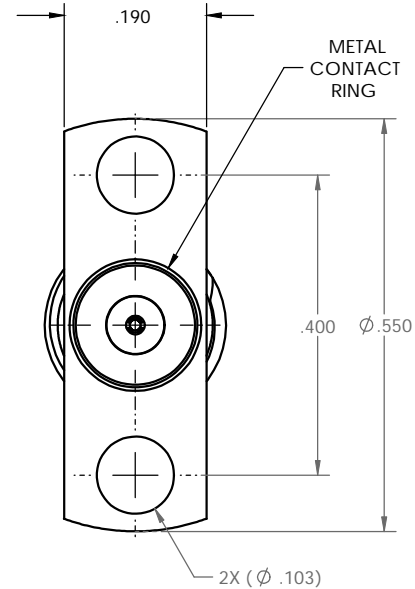


PART NO.	Ø A	B Max.
-1CC	.009±.001	.080
-1CCSF	.009±.001	.080
-2CC	.012±.001	.080
-2CCSF	.012±.001	.080
-3CC	.015±.001	.080
-3CCSF	.015±.001	.080
-4CC	.018±.001	.080
-4CCSF	.018±.001	.080
-5CC	.020±.001	.080
-5CCSF	.020±.001	.080

REVISIONS			
REV	DESCRIPTION	DATE	BY
-	INITIAL RELEASE	05.17.10	HT

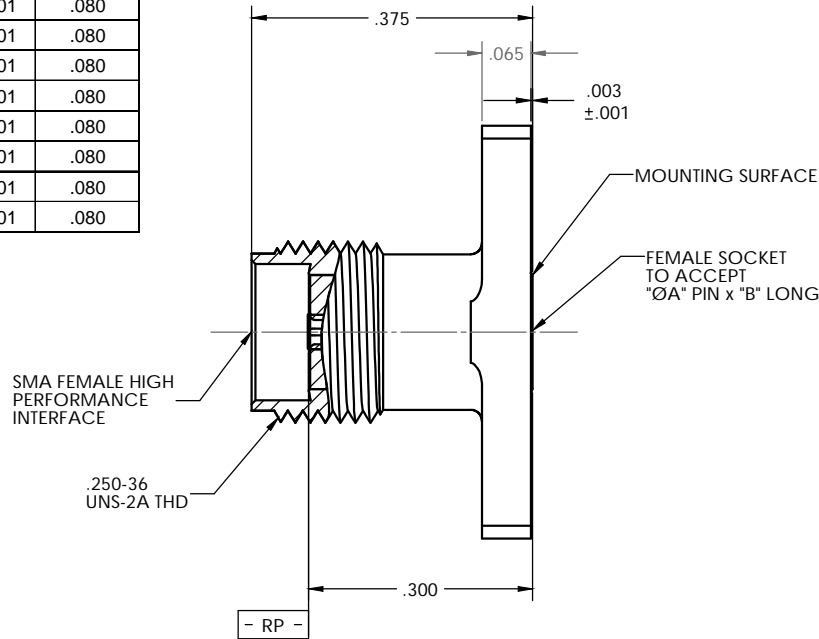

MATERIAL:	ELECTRICAL:	MECHANICAL:	ENVIRONMENTAL:
Body; Insert: 303 SST per ASTM A- 582 Center Conductor: BeCu Alloy per ASTM B- 196 Insulator: PTFE Teflon per ASTM D- 1710 Bead: Ultem 1000 per ASTM 5205	Impedance: 50 Ohms Nom. Freq. Range: DC TO 27 GHz VSWR: 1.10:1 max to 18 GHz 1.15:1 max 18 to 27 GHz Insertion Loss: .035/√f (GHz) dB max. Working Voltage: 335 Vrms max @ Sea Level Dielectric Withstand Voltage: 1000 Vrms min. RF HiPot Voltage: 670 Vrms min. @ 5MHz Corona Level: 250 Vrms @ 70,000 ft Insulation Resistance: 5000 MegaOhms min. R.F. Leakage: - (100 - fGHz). Contact Resistance: Center Conductor: Before Environmental: 6.0 Milliohms After Environmental: 8.0 Milliohms Outer Contact: Before 2.0 Milliohms	Mating Characteristics: SMA high performance Force To Engage: Torque: 2 inch-pounds max. Connector Durability: 500 cycles min @ 12 cycles/minute max. Permeability: Less than 2.0 mu Center Contact Captivation: Axial Force from Interface: 6 pounds min. Rotational Captivation: Torque: 4 inch-ounces min.	Temp. Range: - 65°C to +165°C Thermal Shock: MIL- STD- 202, Method 107, Test Cond. B Moisture Resistance: MIL- STD- 202, Method 106. Insulation resistance at least 200 MegaOhms within 5 minutes after removal from humidity Corrosion: MIL- STD- 202, Method 101, Test Cond. B Vibration: MIL- STD- 202, Method 204, Test Cond. D Shock: MIL- STD- 202, Method 213, Test Cond. I

FINISH:
Body (for CCSF): Passivate per ASTM A- 967. Body (for CC): Goldplate per ASTM B- 488, over nickel under plate per SAE AMS- QQ- N- 290. Center Conductor Goldplate per ASTM B- 488, over nickel under plate per SAE AMS- QQ- N- 290.

APPLICABLE CARLISLE IT DOCUMENTS		
WORK STANDARD	PROD INSTRUC	ASSY INSTRUC
NA	NA	NA

NOTICE
 THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED BY CARLISLE INTERCONNECT TECHNOLOGIES & ALL DESIGN, MANUFACTURING, REPRODUCTION, USE & SALE RIGHTS REGARDING THE SAME ARE EXPRESSLY RESERVED. IT IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP FOR A SPECIFIED PURPOSE & THE RECIPIENT AGREES BY ACCEPTING THIS DRAWING NOT SUPPLY OR DISCLOSE ANY INFORMATION REGARDING IT TO ANY UNAUTHORIZED PERSON TO INCORPORATE IN OTHER PROJECTS ANY SPECIAL FEATURES PECULIAR TO THIS DESIGN. ALL PATENT RIGHTS HERETO ARE EXPRESSLY RESERVED BY CARLISLE INTERCONNECT TECHNOLOGIES, LONG BEACH, CALIFORNIA 90815.

TOLERANCES AND NOTES	
EXCEPT AS NOTED	
DIMENSIONS ARE IN INCHES	
LINEAR .XX ±.005	ANGULAR ±1/2°
FRACTION ±1/32	
1. MACHINE FINISH: Rz/RMS	
2. BREAK ALL SHARP EDGES .003 MAX.	
3. MACHINED RILLETS .005 MAX.	
4. MACHINED SURFACES SQUARE TO RESPECTIVE AXIS WITHIN .005 INCHES PER INCH.	
5. MACHINED DIAMETERS CONCENTRIC WITHIN .002 TLR.	
6. DIMENSIONS TO BE MET BEFORE PLATING.	
7. CHAMFER ALL THREADS 45°.	
8. THREADS PER H-28	
9. REMOVE FRADED EDGES ON TEFLON.	
10. REMOVE ALL BURRS.	

APPROVAL		MATERIAL		SIZE		SPECIFICATION		PROCUREMENT	
INITIALS	DATE								
HT	05.17.10								
TITLE		CARLISLE Interconnect Technologies Long Beach, CA 90815							
DESIGN ENGR		SMA FEMALE, HIGH PERFORMANCE, 2 HOLE FLANGE (.190 X .550) MOUNT, FIELD REPLACEABLE							
SCALE		SUB-DIRECTORY/FILE NAME		SHEET 1 OF 1					
8:1		_OL/							
SIZE		CAGE CODE/DRAWING NO.		H5636					
C 30990									